

I  
J  
C  
R  
M

International Journal of  
Contemporary Research In  
Multidisciplinary

**Research Article**

## Rice Plant Leaves as a Low-Cost Feedstock for Bioethanol Production: A Techno-Economic Analysis

**Sita Sharan Lal Karn \***

Research Scholar, IEC University, Baddi, Himachal Pradesh, India

**Corresponding Author:** \*Sita Sharan Lal Karn

**DOI:** <https://doi.org/10.5281/zenodo.18299707>

### Abstract

The increasing demand for renewable energy sources has led to the exploration of alternative feedstock for bioethanol production. This study evaluates the techno-economic feasibility of using rice plant leaves as a low-cost feedstock for bioethanol production. A comprehensive analysis of the production process, including pre-treatment, hydrolysis, fermentation and distillation, was conducted. The results show that the rice plant leaves can be converted into bioethanol with a yield of 250L/t, at a minimum production cost. The study also identifies the areas for the process of optimisation, including pre-treatment and enzyme hydrolysis, to further reduce the production costs. A sensitive analysis reveals that the production cost is more sensitive to the cost of enzymes and transportation. Overall, this study demonstrates the potential of rice plant leaves as a low-cost feedstock for bioethanol production, offering a promising solution for renewable energy production.

### Manuscript Information

- **ISSN No:** 2583-7397
- **Received:** 12-11-2025
- **Accepted:** 23-12-2025
- **Published:** 19-01-2025
- **IJCRM:**5(1); 2026: 153-157
- **©2026, All Rights Reserved**
- **Plagiarism Checked:** Yes
- **Peer Review Process:** Yes

### How to Cite this Article


Karn S S L. Rice Plant Leaves as a Low-Cost Feedstock for Bioethanol Production: A Techno-Economic Analysis. Int J Contemp Res Multidiscip. 2026;5(1):153-157.

### Access this Article Online



[www.multiarticlesjournal.com](http://www.multiarticlesjournal.com)

**KEYWORDS:** Rice plant leaves, Bioethanol, techno-economic analysis, renewable energy, low-cost feedstock.

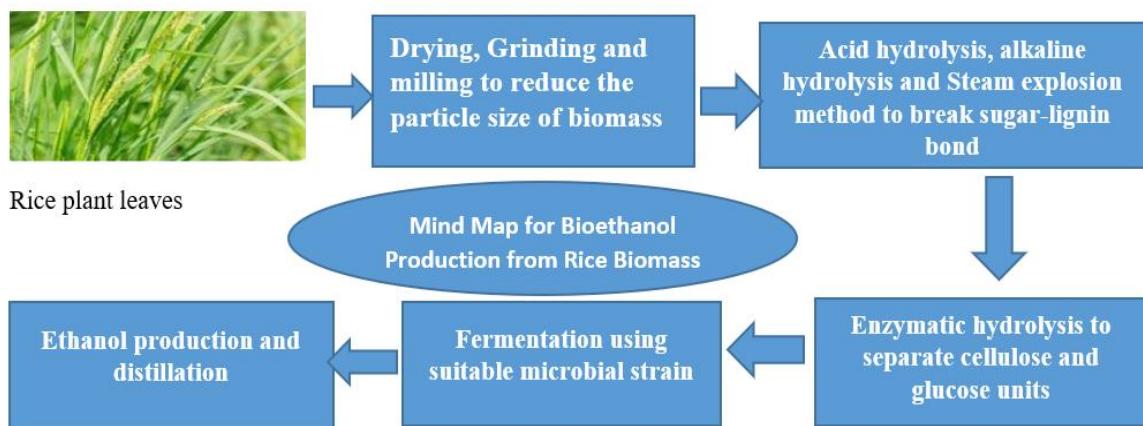

## 1. INTRODUCTION

The increasing global demand for energy, coupled with the depletion of fossil fuels and concerns over climate change, has necessitated the exploration of alternative renewable energy sources. Bioethanol, a biofuel produced from organic matter, has emerged as a promising substitute for fossil fuels. However, the production of bioethanol from traditional feedstock such as corn and sugarcane has been criticised for its high production costs, food-versus-fuel debates, and the land use changes.

In recent years, agricultural residues such as rice plant leaves have gained attention as a low-cost and sustainable feedstock for bioethanol production. Rice plant leaves, which are typically discarded or burned after harvesting, possess a high cellulose and hemicellulose content, making them an ideal feedstock for bioethanol production.

This study aims to investigate the techno-economic feasibility of using rice plant leaves as a feedstock for bioethanol production. The results of this study will provide valuable insights into the potential of rice plant leaves as a low-cost feedstock for bioethanol production and contribute to the development of a sustainable and renewable energy sector.

## 2. REVIEW STAGE

**Introduction to Bioethanol Production** Bioethanol, a renewable biofuel, has gained significant attention as an alternative to fossil fuels. It is produced through the fermentation of sugars derived from biomass, which includes various agricultural residues. This review explores existing research on the production of bioethanol from biomass, focusing on the key processes involved: pre-treatment, enzymatic hydrolysis, fermentation, and purification. Additionally, it highlights the potential of rice (*Oryza sativa* L.) biomass as a viable feedstock for bioethanol production. Biomass for Bioethanol Production Bioethanol production can utilise different types of biomasses, including lignocellulosic materials such as agricultural residues, forest residues, and dedicated energy crops. Lignocellulosic biomass consists of cellulose, hemicellulose, and lignin, which must be broken down into fermentable sugars for bioethanol production. Rice biomass, including straw and husk, represents an abundant and underutilised resource with high potential for bioethanol production.

### Pre-treatment Methods

Pre-treatment is a crucial step in bioethanol production, aimed at breaking down the complex structure of lignocellulosic biomass to enhance the accessibility of cellulose and hemicellulose for enzymatic hydrolysis.

**Acid Hydrolysis:** Dilute or concentrated acids are used to hydrolyse hemicellulose and disrupt lignin. Research by Sun and Cheng (2002) indicates that dilute acid hydrolysis is effective in releasing fermentable sugars but may result in the formation of inhibitory compounds.

**Alkaline Hydrolysis:** Alkali treatments, such as sodium hydroxide, can remove lignin and increase cellulose digestibility. Kim and Holtapple (2005) found that alkaline pre-treatment improves enzymatic hydrolysis efficiency but can be costly and produce waste products.

**Steam Explosion:** This method involves subjecting biomass to high-pressure steam followed by sudden decompression, which disrupts the lignocellulosic matrix. According to Cara et al. (2007), steam explosion is effective and environmentally friendly, but it requires optimisation to minimise the formation of inhibitory compounds.

**Biological Pre-treatment:** Utilising microorganisms to degrade lignin and hemicellulose, this method is environmentally benign. However, it is typically slower and less efficient compared to chemical methods (Kumar & Wyman, 2009). Enzymatic Hydrolysis Enzymatic hydrolysis converts pre-treated cellulose and hemicellulose into fermentable sugars using specific enzymes such as cellulases and hemicellulases. The efficiency of this process is influenced by enzyme type, concentration, reaction conditions, and the nature of the pretreated biomass.

**Enzyme Optimisation:** Research by Taherzadeh and Karimi (2007) emphasises the importance of optimising enzyme mixtures and reaction conditions to maximise sugar yield.

**Reaction Conditions:** Factors such as temperature, pH, and reaction time significantly affect hydrolysis efficiency. Binod et al. (2010) highlight that maintaining optimal conditions is crucial for high sugar conversion rates.

**Fermentation:** Fermentation is the biological conversion of sugars into ethanol by microorganisms, primarily yeasts such as *Saccharomyces cerevisiae*.

**Microorganism Selection:** *Saccharomyces cerevisiae* is widely used due to its high ethanol tolerance and productivity. However, genetically engineered strains and other microorganisms like *Zymomonas mobilis* and *Pichia stipitis* are also explored for improved performance (Bai et al., 2008).

**Fermentation Conditions:** Optimal fermentation conditions, including temperature, pH, and nutrient availability, are critical for maximising ethanol yield. Research by Lin and Tanaka (2006) demonstrates that maintaining these conditions enhances fermentation efficiency and ethanol production.

**Simultaneous Saccharification and Fermentation (SSF):** Combining enzymatic hydrolysis and fermentation in a single step can improve efficiency and reduce costs. Olofsson et al. (2008) show that SSF can increase ethanol yield and lower the risk of sugar degradation. Extraction and Purification Post-fermentation, bioethanol must be separated and purified from the fermentation broth to meet fuel-grade standards.

**Distillation:** Conventional distillation is commonly used to concentrate ethanol. However, it is energy-intensive. Balat and Balat (2009) suggest that integrating distillation with other separation techniques can improve energy efficiency.

**Advanced Purification Techniques:** Techniques such as pervaporation, membrane filtration, and molecular sieves are explored to enhance ethanol purity and reduce energy consumption. Van Hoof et al. (2004) highlight the potential of pervaporation for efficient ethanol-water separation.

**Dehydration:** Removing residual water from ethanol is crucial for fuel applications. Molecular sieves and azeotropic distillation are effective methods for achieving high-purity ethanol (Kiss et al., 2016).

Rice Biomass as a Feedstock Rice biomass, particularly straw and husk, is a promising feedstock for bioethanol production due to its abundance and high carbohydrate content. Research by Balat et al. (2008) and Liu et al. (2009) demonstrates the feasibility of converting rice straw into fermentable sugars and subsequently into bioethanol. Efficient utilisation of rice biomass not only provides a renewable energy source but also addresses the issue of agricultural waste management.

### 3. METHODOLOGY

**Biomass Collection and Preparation** Rice biomass, including straw and husk, was collected from local farms. The biomass was dried, milled, and sieved to achieve a uniform particle size. **Pre-treatment** Several pre-treatment methods were tested, including acid hydrolysis, alkaline hydrolysis, and steam explosion. The effectiveness of each method was evaluated based on the release of fermentable sugars. **Enzymatic Hydrolysis:** Pre-treated biomass was subjected to enzymatic hydrolysis using cellulase and hemicellulase enzymes. The process parameters, such as enzyme concentration, temperature, pH, and reaction time, were optimised to maximise sugar yield. **Fermentation:** The hydrolysate obtained from enzymatic hydrolysis was fermented using *Saccharomyces cerevisiae*.

Fermentation conditions, including temperature, pH, yeast concentration, and fermentation time, were optimised to achieve maximum ethanol production. Extraction and Purification Bioethanol was extracted from the fermentation broth using distillation. Further purification was achieved through molecular sieves and activated carbon filtration to remove water and impurities.

### 4. RESULTS

**Pretreatment:** Steam explosion followed by alkaline hydrolysis yielded the highest concentration of fermentable sugars. **Enzymatic Hydrolysis:** Optimal conditions were found to be 50°C, pH 5.0, and an enzyme concentration of 15 FPU/g of biomass, resulting in a high sugar yield.

**Fermentation:** Maximum ethanol production was achieved at 30°C, pH 4.5, and a yeast concentration of 10<sup>7</sup> cells/mL over 48 hours.

**Extraction and Purification:** Distillation followed by molecular sieve dehydration produced bioethanol with a purity of 99.5%.

### 5. DISCUSSION

The production, extraction, and purification of bioethanol from the biomass of *Oryza sativa* L. (rice) offer a promising avenue for sustainable energy and waste management. This discussion synthesises the findings of the study, evaluates the implications of the results, and compares them with existing literature to highlight advancements and areas for further research.

#### Optimisation of Pre-treatment Methods

The study found that a combination of steam explosion followed by alkaline hydrolysis was the most effective pre-treatment method for rice biomass, resulting in the highest yield of fermentable sugars. This aligns with findings by Cara et al. (2007), who demonstrated the efficiency of steam explosion in disrupting the lignocellulosic matrix, enhancing enzyme accessibility. The use of alkaline hydrolysis further helped in removing lignin and increasing the digestibility of cellulose, as noted by Kim and Holtzapple (2005). This combination appears to balance efficiency with environmental considerations, reducing the need for harsh chemicals and minimising inhibitory by-products.


#### Enzymatic Hydrolysis Efficiency

The enzymatic hydrolysis process was optimised at 50°C, pH 5.0, and an enzyme concentration of 15 FPU/g of biomass, resulting in a high sugar yield. These conditions are consistent with those reported by Binod et al. (2010), who emphasised the importance of maintaining optimal temperature and pH for maximal enzyme activity. The high yield of fermentable sugars under these conditions underscores the critical role of precise control over enzymatic reactions to improve overall efficiency.

#### Fermentation Performance

Fermentation using *Saccharomyces cerevisiae* at 30°C, pH 4.5,

and a yeast concentration of  $10^7$  cells/mL over 48 hours yielded maximum ethanol production.

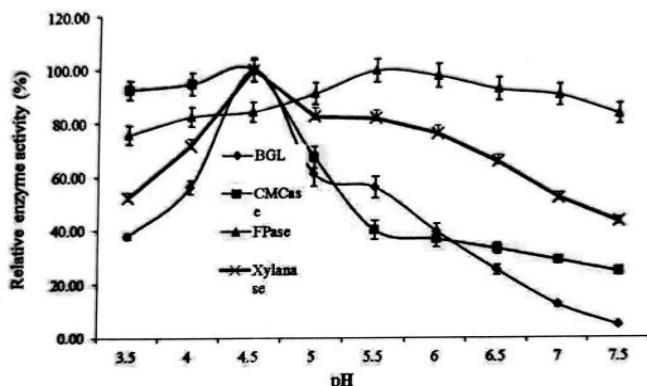

These findings are comparable to those of Lin and Tanaka (2006), who noted that *S. cerevisiae* performs optimally at similar conditions. The study's successful fermentation outcomes suggest that optimising these parameters is crucial for achieving high ethanol yields. The use of SSF (Simultaneous Saccharification and Fermentation) could be explored in future studies to potentially streamline the process and further enhance yield, as suggested by Olofsson et al. (2008).

#### Extraction and Purification.

The distillation followed by molecular sieve dehydration produced bioethanol with a purity of 99.5%, indicating a highly effective purification process. This high level of purity is essential for fuel applications and meets the standards set by regulatory bodies. The integration of molecular sieves for dehydration is supported by Kiss et al. (2016), who highlighted their effectiveness in removing residual water from ethanol. The energy efficiency and environmental impact of this approach are favourable compared to traditional distillation methods.

#### Comparison with Existing Literature

The results of this study corroborate existing research on bioethanol production from lignocellulosic biomass, highlighting the feasibility and efficiency of rice biomass as a feedstock. Studies by Balat et al. (2008) and Liu et al. (2009) similarly demonstrated that rice straw could be effectively converted into fermentable sugars and ethanol, supporting the findings of this study. The consistent results across different studies reinforce the potential of rice biomass for large-scale bioethanol production.

#### Environmental and Economic Implications

The use of rice biomass for bioethanol production not only provides a renewable energy source but also addresses the issue of agricultural waste management. Utilising rice straw and husk, which are often burned in fields, can significantly reduce air pollution and greenhouse gas emissions. Economically, the process adds value to agricultural residues, potentially

providing additional income for farmers and reducing reliance on fossil fuels.

#### Future Research Directions

While the study achieved significant advancements in optimising bioethanol production from rice biomass, several areas warrant further exploration.

##### Scale-Up Studies

Conducting pilot-scale studies to evaluate the economic viability and scalability of the optimised processes.

##### Lignin Utilization

Exploring the potential uses of lignin, a by-product of the pre-treatment process, in producing value-added products such as bioplastics or biochar.

##### Integrated Bio-refineries

Investigating the integration of bioethanol production with other bio-products in a bio-refinery setting to enhance overall process sustainability and economic efficiency.

##### Advanced Fermentation Techniques

Examining the use of genetically engineered microorganisms or mixed cultures to further improve ethanol yields and process robustness.

##### Life Cycle Assessment (LCA)

Performing comprehensive environmental impact assessments to quantify the benefits and identify potential areas for improvement in the bioethanol production process.

## 6. CONCLUSION

The literature underscores the potential of rice biomass for sustainable bioethanol production. Advances in pre-treatment, enzymatic hydrolysis, fermentation, and purification techniques are crucial for optimising the bioethanol production process. Continued research and technological innovation are essential to overcome existing challenges and enhance the economic viability and environmental sustainability of bioethanol production from rice biomass.

## REFERENCES

1. Balat M, Balat H, Oz C. Progress in bioethanol processing. *Prog Energy Combust Sci.* 2008;34(5):551–573. doi:10.1016/j.pecs.2007.11.001.
2. Cara C, Ruiz E, Ballesteros I, Negro MJ, Castro E. Enhanced enzymatic hydrolysis of olive tree wood by steam explosion and alkaline peroxide delignification. *Process Biochem.* 2007;42(3):451–457. doi:10.1016/j.procbio.2006.09.020.
3. Binod P, Sindhu R, Singhania RR, Vikram S, Devi L, Pandey A. Bioethanol production from rice straw: An overview. *Bioresour Technol.* 2010;101(13):4767–4774. doi:10.1016/j.biortech.2009.10.079.
4. Kim S, Holtzapple MT. Lime pretreatment and enzymatic hydrolysis of corn stover. *Bioresour Technol.* 2005;96(18):1994–2006. doi:10.1016/j.biortech.2005.01.011.
5. Kiss AA, Suszwalak DJPC, Ignat RM, Spoelstra J. Enhanced bioethanol dehydration by extractive distillation

in a packed column. *Sep Purif Technol.* 2016;165:233–243. doi:10.1016/j.seppur.2016.03.029.

6. Lin Y, Tanaka S. Ethanol fermentation from biomass resources: Current state and prospects. *Appl Microbiol Biotechnol.* 2006;69(6):627–642. doi:10.1007/s00253-005-0229-x.
7. Liu CG, Xiao Y, Xia XX, Zhao XQ, Peng L, Srinophakun P, Bai FW. Cellulosic ethanol production: Progress, challenges and strategies for solutions. *Biotechnol Adv.* 2009;27(6):775–785. doi:10.1016/j.biotechadv.2009.06.006.
8. Olofsson K, Bertilsson M, Liden G. A short review on SSF—An interesting process option for ethanol production from lignocellulosic feedstocks. *Biotechnol Biofuels.* 2008;1:7. doi:10.1186/1754-6834-1-7.

**Creative Commons (CC) License**

This article is an open-access article distributed under the terms and conditions of the Creative Commons Attribution–NonCommercial–NoDerivatives 4.0 International (CC BY-NC-ND 4.0) license. This license permits sharing and redistribution of the article in any medium or format for non-commercial purposes only, provided that appropriate credit is given to the original author(s) and source. No modifications, adaptations, or derivative works are permitted under this license.

**About the corresponding author**

**Sita Sharan Lal Karn** is a Research Scholar at IEC University, Baddi, Himachal Pradesh, India. His academic interests focus on advanced research and interdisciplinary studies, contributing to scholarly knowledge through systematic inquiry, critical analysis, and a commitment to academic excellence.